


WWF3x12 W3/W2.5 CIRCUMFERENTIAL

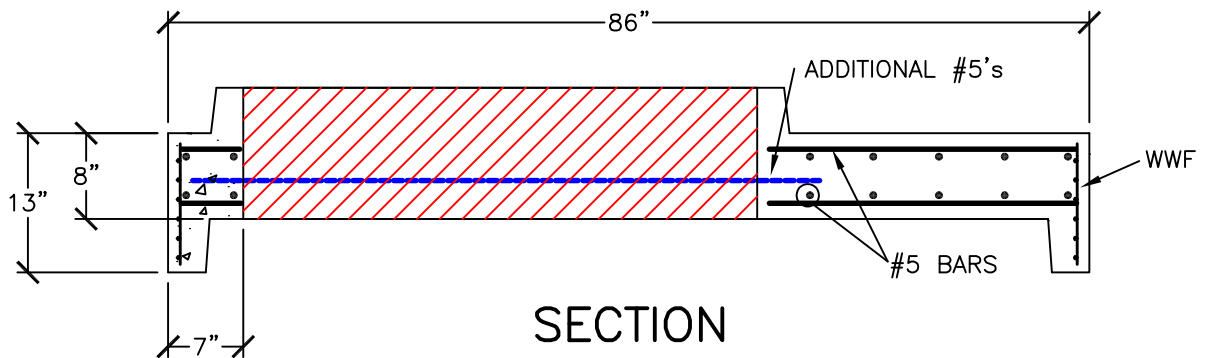

SECTION

SPECIFICATIONS:

MINIMUM CONCRETE STRENGTH 4000 PSI @ 28 DAYS (PENN DOT CLASS AA)
 STEEL REINFORCEMENT ASTM A185 HORIZONTAL TOP SLAB STEEL 1 1/2" MIN. CONCRETE COVER
 MANHOLE DESIGN SPEC. CONFORM TO "PRECAST REINFORCEMENT MANHOLE SECTIONS" ASTM C478, LATEST REVISION.
 72" DIA. MANHOLE FLAT LIDS DESIGNED WITH STANDARD AASHTO HS-25 LIVE LOAD CONDITIONS



**Continental
 Concrete
 Products, Inc.**
 1 South Grosstown Rd.
 Pottstown, PA 19464
 Phone: (610) 327-3700
 Fax: (610) 327-9488

72" TO 48" DIA. FLAT LID

SIGNATURE OF APPROVAL

DATE RRP DWG

3/15/06

72_48LIDMH

STRUCTURE