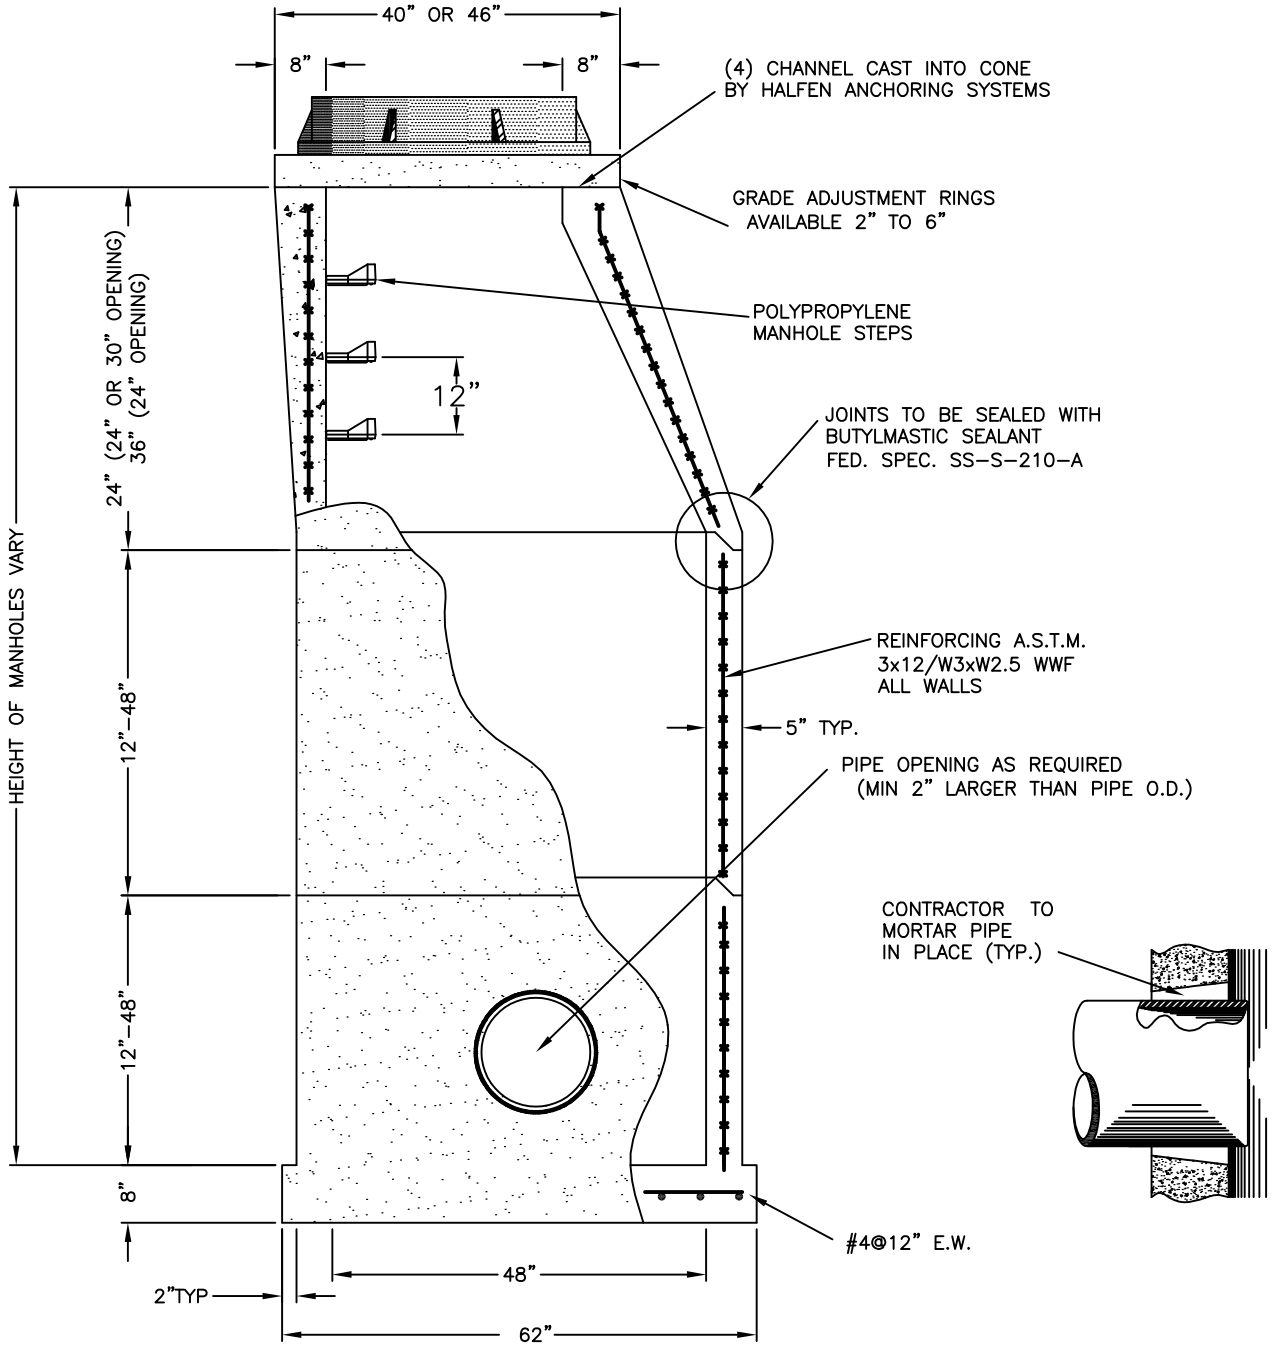

SPECIFICATIONS

MINIMUM CONCRETE STRENGTH 4000 PSI @28 DAYS (PENN DOT CLASS AA)
STEEL REINFORCEMENT –ASTM A185 VERTICAL WALLS STEEL AREA 0.12 IN.²/VERTICAL FOOT.
HORIZONTAL BASE SLAB STEEL AREA 0.13 IN.²/HORIZONTAL FOOT.
1 1/2" MINIMUM CONCRETE COVER (ALL REINFORCEMENT)
MANHOLE DESIGN SPECIFICATIONS CONFORMS TO "PRECAST REINFORCED CONCRETE MANHOLE SECTIONS" ASTM C478, LATEST REVISIONS

Continental Concrete Products, Inc.
1 South Grosstown Rd.
Pottstown, PA 19464
Phone: (610) 327-3700
Fax: (610) 327-9488

48" DIA. STORM MANHOLE

SIGNATURE OF APPROVAL	DATE	RRP	DWG	STRUCTURE
	9/23/04		48STMHCOMM	